

# (12) UK Patent Application (19) GB (11) 2 368 213 (13) A

(43) Date of A Publication 24.04.2002

(21) Application No 9723196.3

(22) Date of Filing 03.11.1997

(71) Applicant(s)  
BAE Systems plc  
(Incorporated in the United Kingdom)  
Warwick House, PO Box 87,  
Farnborough Aerospace Centre, FARNBOROUGH,  
Hants, GU14 6YU, United Kingdom

(72) Inventor(s)  
Nigel Seddon  
Christopher R Splinkings

(74) Agent and/or Address for Service  
BAE Systems plc  
Group IP Department, Lancaster House,  
PO Box 87 Farnborough Aerospace Centre,  
Farnborough, Hampshire GU14 6YU  
United Kingdom

(51) INT CL<sup>7</sup>  
H03H 7/32, H03K 3/80


(52) UK CL (Edition T)  
H3U UQD  
H3P PAPX  
H3T T2B9 T2D T2R1 T3S T3V

(56) Documents Cited  
None

(58) Field of Search  
UK CL (Edition P) H3U UQD  
INT CL<sup>6</sup> H03H 7/18 7/20 7/30 7/32 7/34  
Online: WPI, CLAIMS, JAPIO, EPODOC

(54) Abstract Title  
**A non-linear dispersive pulse generator**

(57) A non-linear dispersive pulse generator for producing pulsed radio frequency electrical signals includes a non-linear dispersive electrical circuit (1) incorporating at least one non-linear element (2) made of a material sensitive to low power signals and a means (5) of producing a variable power control signal (6) and applying it to the element (2) to modify the extent of the non-linearity of the element (2) and thereby vary the output frequency of the radio frequency electrical signal generated by the generator.

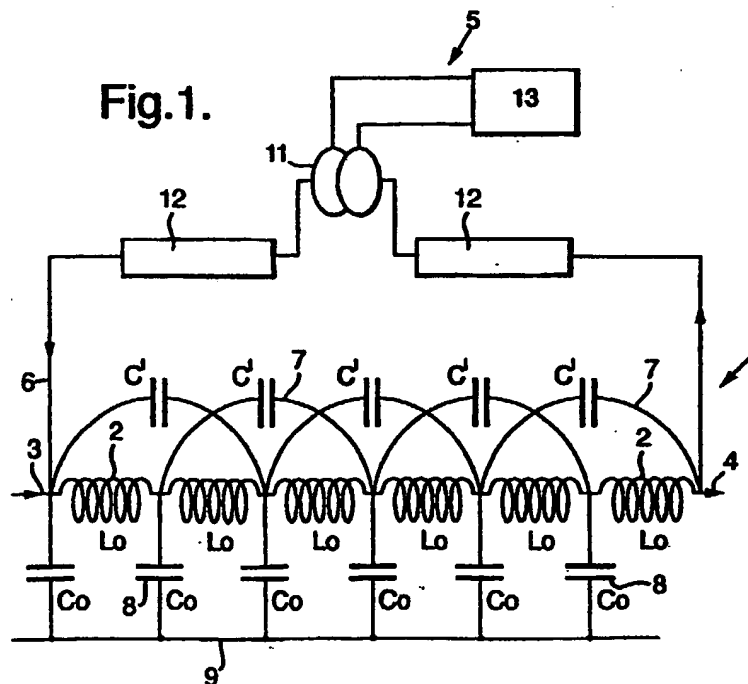

At least one drawing originally filed was informal and the print reproduced here is taken from a later filed formal copy.

The print reflects an assignment of the application under the provisions of Section 30 of the Patents Act 1977.

This Front Page is a reprint to rectify errors introduced in the course of reproduction-06.08.2002

GB 2 368 213 A